

MVOICE 1000-T USB/Bluetooth Conference Speakerphone




Welcome!

MVOICE series speakerphone is specially designed to fulfill the customers' increasing demand for web-conferencing calls, hands-free calls and teleconferencing.

MVOICE 1000- T USB/Bluetooth speakerphone can connect to computer with USB cable for audio and video conference based on internet application, or connect to mobile phone or tablet via Bluetooth to realize wireless hands-free teleconference.

Highlights and features

- Connect to PC via USB.
- Connect to mobile device via Bluetooth
- Three built-in 360° coverage microphones.
- Hi-Fi sound quality.
- DSP noise and echo cancellation.
- Low power consumption..

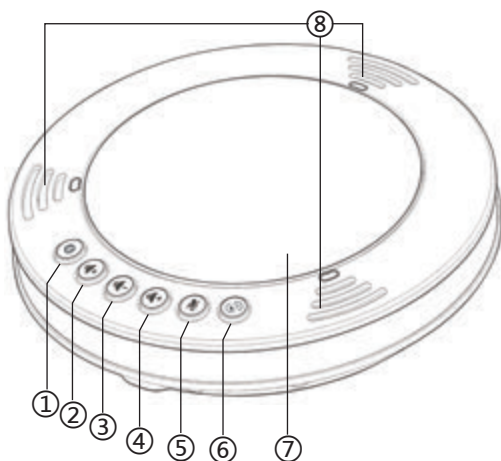

1. Bluetooth
2. Mute speaker
3. Volume down
4. Volume up


5. Mute microphone
6. Battery level / Choose microphone
7. Speaker
8. Microphones

Connecting to PC or laptop

Plug and play, simply connect the MVOICE 1000-T to the USB port on your PC with USB cable. Support Windows XP, Windows Vista, Windows7/8/10 etc.

Attention: MVOICE 1000-T works excellently in web-conferencing via Skype or other VoIP software. The PC can automatically recognize the MVOICE device, but you may need to choose MEETEASY USB AUDIO in application software. For example, you would need to choose MEETEASY USB AUDIO in Skype audio setting section.



Connect to mobile device

Press and hold (2secs) the Bluetooth button  until the light flashes blue. Enable Bluetooth on your mobile device, and select "Meeteasy" from the list of available Bluetooth devices. The light turns solid blue when the connection is established.

Turn off the Bluetooth function

Press and hold (2secs) the Bluetooth button  and then the Bluetooth function will be closed.



Answer /Reject a call via Bluetooth

Short press  to answer the incoming call, long press  to reject the incoming call. When in a connected call or dialing, short press this button could hang up the call.


Attention: Press  too long (over 2 secs.) would turn off the Bluetooth function.

Pairing and playing your device using NFC (optional)

This unit features wireless NFC pairing, which allows playing NFC- enabled devices to pair and play instantly. For pairing NFC devices, please see the following instructions:

1. Turn on MVOICE 1000-T and press the Bluetooth button to turn Bluetooth function.
2. Turn on NFC function on the mobile phone. Touch your mobile phone against the NFC area of your MVOICE 1000-T, which is on the bottom of the unit and has labeled  **NFC** .
3. The unit will turn on and enter automatic pairing mode. "Meeteasy" should appear on your device' s menu when the connection is established. If your device asks if you wish to pair, accept (select "Yes" or similar). Once paired with a device, the blue indicator light will glow steadily.

Mute the speaker

Press the button  can mute the speaker, the button turns orange

Mute the microphones

Press the button  can mute the microphones all, the button turns orange

Increase the volume

Press the button + can increase the volume level

Decrease the volume

Press the button - can decrease the volume level

ON/OFF button

Turn the button to ON side, the MVOICE 1000-T can be powered by built-in battery.


ON/OFF state will not affect the USB charging and USB connectivity to PC.

Attention: Please keep it OFF to save battery power if the unit is not using.

Separate microphone selection

In normal room conditions, the reception distance can reach to 3 meters. Built-in three microphones provides with 360-degree coverage.

For group meeting, all three microphones open can make proper audio reception of all participants. In a conference room with weak sound absorption and strong acoustic reflection (particularly the glass rooms), and the talker is far from the microphones, the microphones will receive the echo from different directions, which is impossible to eliminate completely. The other side of the conference may hear unclear voice. Speak close to the microphone and use only one microphone pointed to the speaker can receive the voice more clearly.

Press  button could turn on one microphone and mute two others in turn. The operating microphone' s indicator turns orange.

Daisy Chain

Every MVOICE 1000-T comes with the built-in ability to connect to other MVOICE 1000-T(up to 5 units). This feature enables you to provide coverage for larger spaces using a chain of MVOICE 1000-T.

Making the connection:

Choose the unit you wish to act as the master unit. This unit will be the one interfacing for the entire chain. The master unit will be the only unit connected to an external device, while the other units will connect only to each other.

Using the provided daisy chain cable to connect one of the cable ends to the master unit' s 3.5mm jack. Take the other end of the cable and connect it to the next MVOICE 1000-T' s 3.5mm jack. Repeat the process in order to connect a third unit to unit number 2. This process can be repeated with up to 5 units. All units in the chain must be MVOICE 1000-T.

Powering the daisy chain

Every unit in the chain must be powered. There are two different way for the master unit and the chained units:


For Master unit: BATTERY MUST BE SHUT OFF, the master unit MUST to be powered by USB power rather than the battery, otherwise the daisy chain function is not useable.

For Chained up units: Can either be powered by built-in battery or USB power.

Speaker and microphone control after daisy chain:

1. Muting the speaker on the master unit will mute the chained units as well, but the chained speaker can be muted separately not effecting other units or master unit.
2. Muting the microphones on the master unit will mute the chained units as well, but the chained microphones can be muted separately not effecting other units or master unit.

Charging the speakerphone

The speakerphone is equipped with a 700mAh battery, which would last for over 4 hours of talk time. When the battery indicator  turns orange and flashes, less than 10 minutes talk time remain. Plug the MVOICE 1000-B with USB cable to USB port on PC or charging adapter to charge the battery.

Charging safety

Charging starts once the MVOICE 3000-B is connected to PC.

Attention: If a charging adapter is used, please make sure it is qualified and the output voltage less than 5V.

Specification:

System requirements	Windows XP/Windows Vista/Windows7/8/10 etc.
Connections	USB version 2.0
Max volume	83dB
Speaker frequency	30-16KHz
Microphone frequency	30-16KHz
Power voltage	5V DC
Power consumption	300mAh max.
Battery capacity	1200mAh
Operating temperature	5°C-40°C
Storage temperature	-30°C-55°C
Accessories	6ft USB cable/Daisy chain cable/Protective bag/Gift box
Compliance	RoHS/FCC/CE

Meeteasy Technology Limited

Add:3/F,Building#10, Jiu Xiang Ling Industrial Zone,Xili, Nanshan District, Shenzhen, China

E-mail: info@meeteasy.com.hk

Tel:(+86) 755 8884 1683 Fax:(+86) 755 2690 5650

For more information, please visit

www.meeteasy.com.hk

